




LIFT TYPE  
CONSOL  
MRL


FLOOR : " 1 "

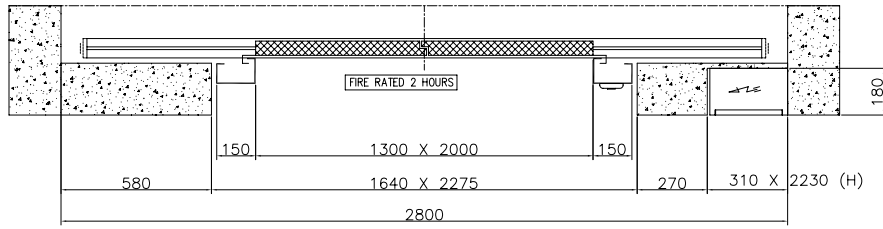

FREE SPACE FOR MAINTENANCE \*  
THE ROOF OF THE CAR SHALL PROVIDE AT ONE POINT Δ  
A CLEAR AREA FOR STANDING OF AT LEAST 0.5 M \*  
IN WHICH THE LESSEMDIMENSION IS AT LEAST 0.25 M.


PLANT VIEW - SC. 1/10

NOTE:  
\* A TELEPHONE LINE MUST BE PERMANENTLY AVAILABLE IN THE CONTROL  
FLOOR, BY A POSTER, TO BE ARMED WITH LIFT DOWNER.

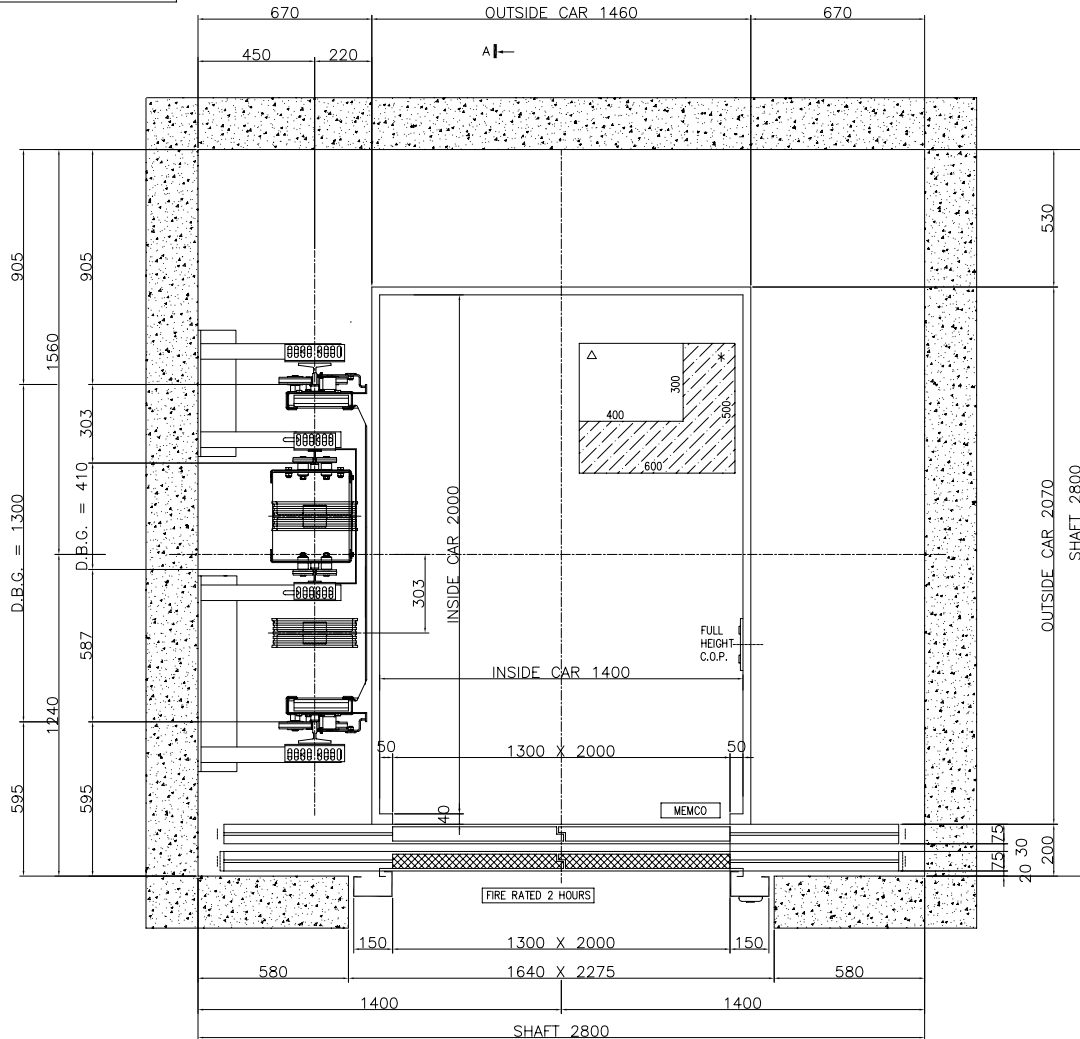

A|—

SECTION A-A - SC. 1/20

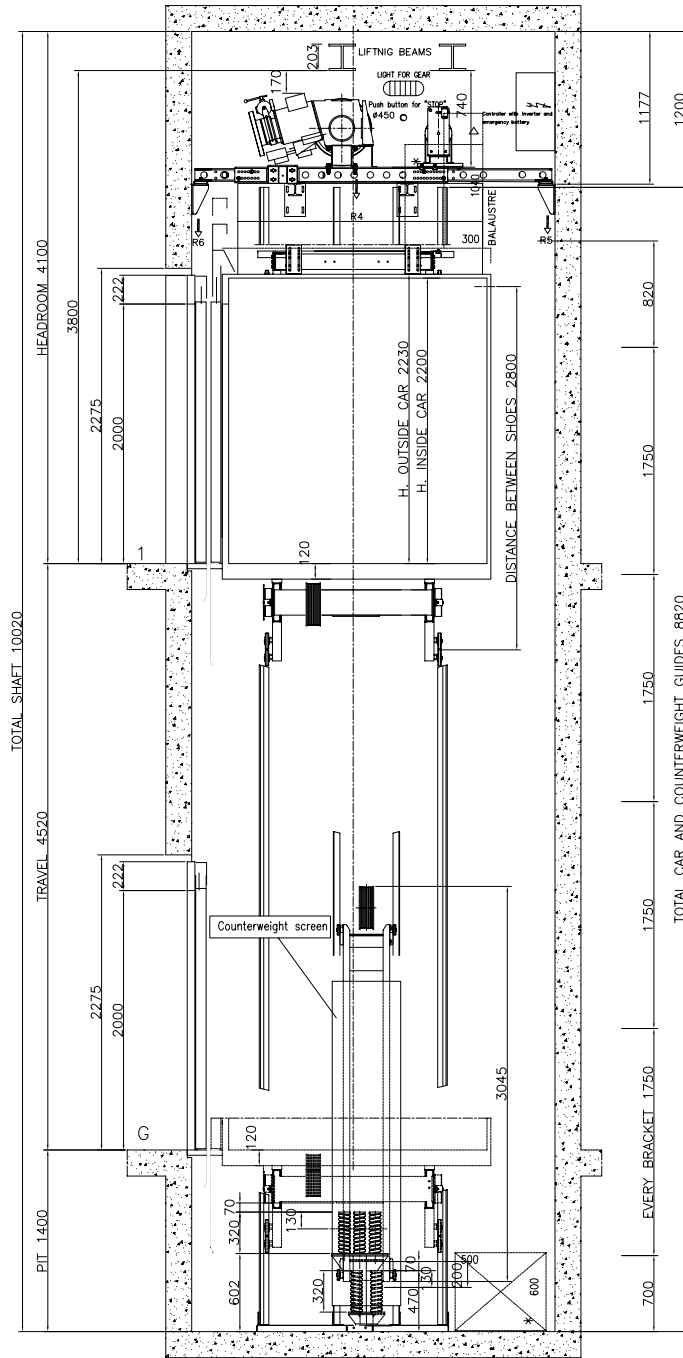

under car n° 3      under c/weight n° 2  
spring buffers type 320-18      spring buffer type 320-18

DATE	09.02.2009	FIRMA	GA
REV.	DATE	PLANT N.	

DRAWING 2/2



Typical CONSOL lift 17 persons